

# Adjustable Steel Props

## Specifications

- Adjustable steel props are designed to support a range of floors and temporary beams.
- SCP props are manufactured from an outer tube 60.3mm dia. and an inner tube of 4.83mm dia. The threaded portion is friction welded to the outer tube to produce a lighter weight prop.
- Adjustable steel props are available in sizes 0 to 4.
- Props are guaranteed to be in stock and delivered within three days of order.
- All SCP props are manufactured in accordance with our ISO 9001:2000 quality system accreditation.

PRODUCT CODE	DESCRIPTION	LENGTH (m)		WEIGHT (kgs)
		Closed	Open	
9-270-LWI-00	Standard No. 0 Props	1.041	1.829	11.28
9-270-LWI-01	Standard No. 1 Props	1.753	3.124	16.34
9-270-LWI-02	Standard No. 2 Props	1.981	3.352	17.48
9-270-LWI-03	Standard No. 3 Props	2.590	3.962	20.20
9-270-LWI-04	Standard No. 4 Props	3.200	4.876	23.84


Props are fully tested in house on our own equipment.

Over 40 years of Prop manufacturing experience within SCP.

We have the capability to produce any specification of prop you may require.

## High specification products designed to last...

1 Station Court, Girton Road, Cannock, Staffordshire WS11 0EJ  
Tel: 01543 467 800 | Fax: 01543 467 993 | Email: [acp@scpburton.co.uk](mailto:acp@scpburton.co.uk)

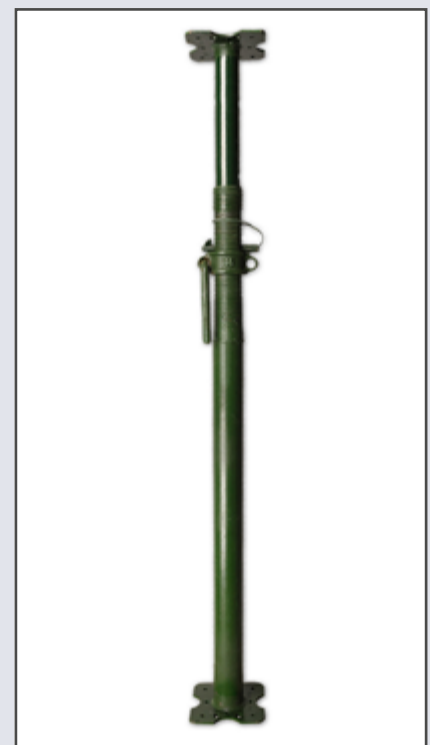

## Technical Information

- All props are manufactured to BS4074:1982 and tested to BS5507-3:1982.
- Head and Base Plates 150 x 150 x 6mm to BS4360 with 38mm dia. hole.
- Pin 080M40 BS970.
- Finished in one coat air drying.